

Thermal Performance Data

Premium Bi-fold Door (8622) - Standard sill

WEATHER SHIELD.

WINDOWS & DOORS

US Qualification Criteria		Climate Zone	U-Value	SHGC
	As of January 2016	Northern North-Central South-Central Southern	<=0.30	<=0.40 <=0.25

Canadian Qualification Criteria		Climate Zone	U-Value	or	Energy Rating
	As of February 2015	Zone 1 Zone 2 Zone 3	<=1.60 <=1.40 <=1.20		>=25 >=29 >=34
			Air Leakage <= 0.3 cfm/ft ²		

U-Value

A measurement of how much energy a material conducts. The lower the U-Value, the greater the insulating effect.

Solar Heat Gain Coefficient (SHGC)

Measures how well a window or door prevents heat from passing through it.

The lower a window or door's SHGC, the less heat it allows to pass through it.

Visible Light Transmittance

The amount of light in the visible portion of the spectrum that passes through a glazing material.

Condensation Resistance Rating

Measures how well a window resists the formation of condensation on the inside surface.

The higher the number the better resistance to condensation.

Energy Rating

A value demonstrating the balance between U-Value, SHGC and air leakage.

The higher the number, the more efficient the product.

R-Value

A measurement of how much a material resists heat transfer.

A higher R-Value means a greater insulating effect and a lower rate of heat flow out of the home.



While **R-value** measures resistance to heat transfer, **U-value** measures the rate of heat transfer.

In simple terms, **U-value** is the mathematical reciprocal of **R-value**; that is, **U = 1/R** and **R = 1/U**.

^a Total Unit calculations are derived from computer simulations that are then verified by 3rd party testing in accordance with NFRC 100, NFRC 200, and NFRC 500.

^b Published values reflect 3mm/3mm glass lite thicknesses.

ENERGY PERFORMANCE DATA											CANADIAN ENERGY PEFORMANCE DATA				CANADA ENERGY STAR v 4.1						
Grille Option	Glazing thickness	^a NFRC Total Unit Calculations ^b Glazing Option							CPD #	U-Value	Solar Heat Gain Coefficient	Visible Light Transmittance	Condensation Resistance Rating	US ENERGY STAR V 6.0				U-Value (metric)	Maximum Air Leakage Ls/m ²	Air Infiltration/Exfiltration Average	Energy Rating
														N	NC	SC	S				
No GIA or SDL	1"	Clear Insul	WEA-N-301-00243-00001	0.42	0.41	0.43	44											2.39	0.6	0.08	11
	1"	Insul Low-E	WEA-N-301-00244-00001	0.34	0.23	0.37	53											1.93	0.6	0.08	11
	1"	Insul Low E w/Argon	WEA-N-301-00252-00001	0.32	0.22	0.37	55											1.82	0.6	0.08	13
	1"	Passive Solar	WEA-N-301-00246-00001	0.34	0.37	0.41	52											1.93	0.6	0.08	19
	1"	Passive Solar w/Argon	WEA-N-301-00254-00001	0.32	0.37	0.41	55											1.82	0.6	0.08	21
	1"	Passive Solar Extreme	WEA-N-301-00250-00001	0.30	0.33	0.40	42	Y	Y									1.70	0.6	0.08	22
	1"	Passive Solar Extreme w/Argon	WEA-N-301-00258-00001	0.29	0.33	0.40	45	Y	Y									1.65	0.6	0.08	23
	1"	Zo-e-shield 5	WEA-N-301-00245-00001	0.34	0.15	0.34	53											1.93	0.6	0.08	6
	1"	Zo-e-shield 5 w/ Argon	WEA-N-301-00253-00001	0.31	0.15	0.34	56											1.76	0.6	0.08	10
	1"	Zo-e-shield 5 Extreme	WEA-N-301-00249-00001	0.30	0.15	0.33	43	Y	Y	Y	Y							1.70	0.6	0.08	11
	1"	Zo-e-shield 5 Extreme w/ Argon	WEA-N-301-00257-00001	0.28	0.15	0.33	46	Y	Y	Y	Y							1.59	0.6	0.08	14
	1"	Zo-e-shield 6	WEA-N-301-00325-00001	0.33	0.15	0.33	52											1.87	0.6	0.08	8
	1"	Zo-e-shield 6 w/ Argon	WEA-N-301-00332-00001	0.31	0.15	0.33	55											1.76	0.6	0.08	10
	1"	Zo-e SafeGuard Certified	WEA-N-301-00328-00001	0.33	0.15	0.33	51											1.87	0.6	0.08	8
	1"	Zo-e SafeGuard Certified w/ Argon	WEA-N-301-00335-00001	0.31	0.15	0.33	56											1.76	0.6	0.08	10
	1"	Zo-e-shield 7	WEA-N-301-00307-00001	0.29	0.14	0.27	59	Y	Y	Y	Y							1.65	0.6	0.08	12
	1"	Zo-e-shield 7 w/ Argon	WEA-N-301-00311-00001	0.26	0.14	0.27	62	Y	Y	Y	Y							1.48	0.6	0.08	16
	1"	Insul Low-E 240	WEA-N-301-00247-00001	0.34	0.14	0.21	52											1.93	0.6	0.08	6
	1"	Insul Low-E 240 w/Argon	WEA-N-301-00255-00001	0.32	0.14	0.21	55											1.82	0.6	0.08	8
	1"	Insul Low-E 340	WEA-N-301-00248-00001	0.34	0.11	0.20	53											1.93	0.6	0.08	4
	1"	Insul Low-E 340 w/Argon	WEA-N-301-00256-00001	0.31	0.10	0.20	56											1.76	0.6	0.08	7
	1"	Bronze Low E	WEA-N-301-00244-00011	0.34	0.21	0.28	53											1.93	0.6	0.08	10
	1"	Bronze Low E w/Argon	WEA-N-301-00252-00011	0.32	0.21	0.28	55											1.82	0.6	0.08	12
Less Than 1" GIA or SDL	1"	Clear Insul	WEA-N-301-00243-00002	0.42	0.35	0.36	44											2.39	0.6	0.08	8
	1"	Insul Low-E	WEA-N-301-00244-00002	0.34	0.20	0.32	53											1.93	0.6	0.08	9
	1"	Insul Low E w/Argon	WEA-N-301-00252-00002	0.32	0.19	0.32	55											1.82	0.6	0.08	11
	1"	Passive Solar	WEA-N-301-00246-00002	0.34	0.31	0.35	52											1.93	0.6	0.08	15
	1"	Passive Solar w/Argon	WEA-N-301-00254-00002	0.32	0.31	0.35	55											1.82	0.6	0.08	18
	1"	Passive Solar Extreme	WEA-N-301-00250-00002	0.30	0.29	0.34	42	Y	Y									1.70	0.6	0.08	19
	1"	Passive Solar Extreme w/Argon	WEA-N-301-00258-00002	0.29	0.29	0.34	45	Y	Y									1.65	0.6	0.08	20
	1"	Zo-e-shield 5	WEA-N-301-00245-00002	0.34	0.13	0.28	53											1.93	0.6	0.08	5
	1"	Zo-e-shield 5 w/ Argon	WEA-N-301-00253-00002	0.31	0.13	0.28	56											1.76	0.6	0.08	9
	1"	Zo-e-shield 5 Extreme	WEA-N-301-00249-00002	0.30	0.13	0.28	43	Y	Y	Y	Y							1.70	0.6	0.08	10
	1"	Zo-e-shield 5 Extreme w/ Argon	WEA-N-301-00257-00002	0.28	0.13	0.28	46	Y	Y	Y	Y							1.59	0.6	0.08	13
	1"	Zo-e-shield 6	WEA-N-301-00325-00002	0.33	0.13	0.28	52											1.87	0.6	0.08	6
	1"	Zo-e-shield 6 w/ Argon	WEA-N-301-00332-00002	0.31	0.13	0.28	55											1.76	0.6	0.08	9
	1"	Zo-e SafeGuard Certified	WEA-N-301-00328-00002	0.33	0.13	0.28	51											1.87	0.6	0.08	6
	1"	Zo-e SafeGuard Certified w/ Argon	WEA-N-301-00335-00002	0.31	0.13	0.28	56											1.76	0.6	0.08	9
	1"	Zo-e-shield 7	WEA-N-301-00308-00001	0.29	0.12	0.23	59	Y	Y	Y	Y							1.65	0.6	0.08	11
	1"	Zo-e-shield 7 w/ Argon	WEA-N-301-00312-00001	0.27	0.12	0.23	62	Y	Y	Y	Y							1.53	0.6	0.08	13
	1"																				

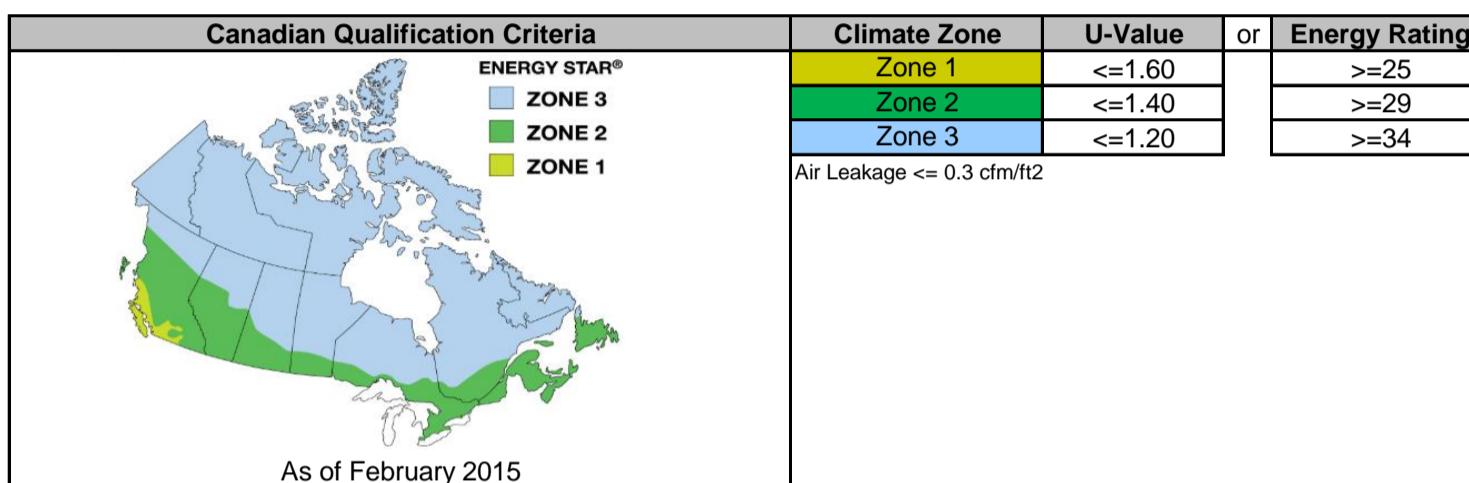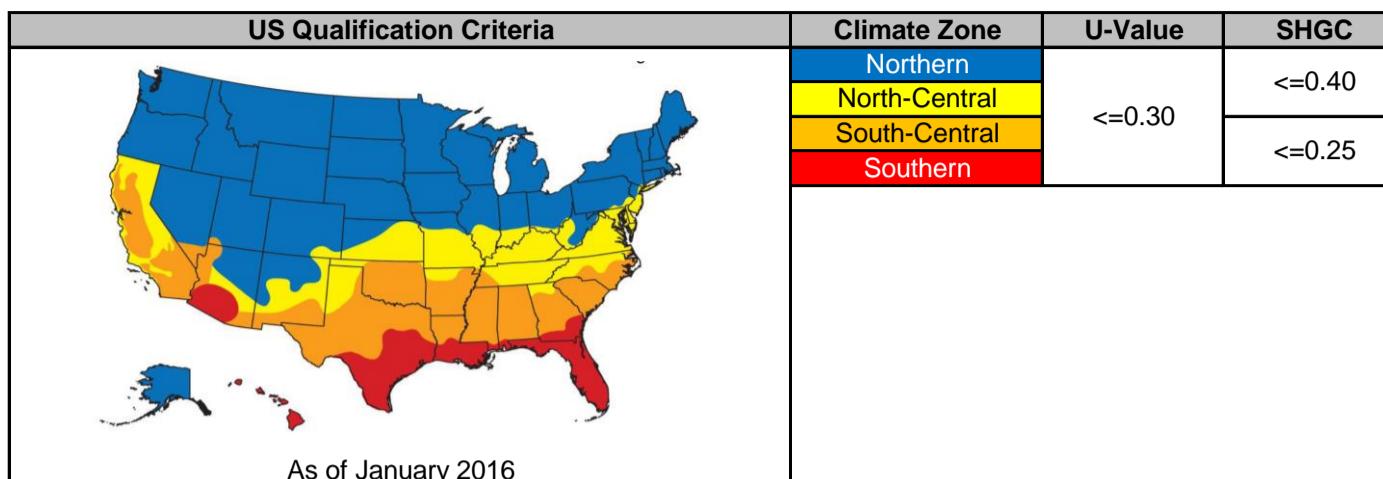

U-Value

A measurement of how much energy a material conducts. The lower the U-Value, the greater the insulating effect.

Solar Heat Gain Coefficient (SHGC)

Measures how well a window or door prevents heat from passing through it.

The lower a window or door's SHGC, the less heat it allows to pass through it.

Visible Light Transmittance

The amount of light in the visible portion of the spectrum that passes through a glazing material.

Condensation Resistance Rating

Measures how well a window resists the formation of condensation on the inside surface.

The higher the number the better resistance to condensation.

Energy Rating

A value demonstrating the balance between U-Value, SHGC and air leakage.

The higher the number, the more efficient the product.

R-Value

A measurement of how much a material resists heat transfer.

A higher R-Value means a greater insulating effect and a lower rate of heat flow out of the home.

While **R-value** measures resistance to heat transfer, **U-value** measures the rate of heat transfer.

In simple terms, **U-value** is the mathematical reciprocal of **R-value**; that is, **U = 1/R** and **R = 1/U**.

^a Total Unit calculations are derived from computer simulations that are then verified by 3rd party testing in accordance with NFRC 100, NFRC 200, and NFRC 500.

^b Published values reflect 3mm/3mm glass lite thicknesses.



ENERGY PERFORMANCE DATA											CANADIAN ENERGY PEFORMANCE DATA				CANADA ENERGY STAR v 4.1			
Grille Option	Glazing thickness	^a NFRC Total Unit Calculations ^b Glazing Option		CPD #	U-Value	Solar Heat Gain Coefficient	Visible Light Transmittance	Condensation Resistance Rating	US ENERGY STAR V 6.0				U-Value (metric)	Maximum Air Leakage Ls/m ²	Air Infiltration/Exfiltration Average	Energy Rating		
									N	NC	SC	S						
No GIA or SDL	1"	Clear Insul		WEA-N-301-00423-00001	0.42	0.41	0.43	44					2.39	0.6	0.08	11		
	1"	Insul Low-E		WEA-N-301-00424-00001	0.34	0.23	0.37	53					1.93	0.6	0.08	11		
	1"	Insul Low E w/Argon		WEA-N-301-00432-00001	0.32	0.22	0.37	55					1.82	0.6	0.08	13		
	1"	Passive Solar		WEA-N-301-00426-00001	0.34	0.37	0.41	52					1.93	0.6	0.08	19		
	1"	Passive Solar w/Argon		WEA-N-301-00434-00001	0.32	0.37	0.41	55					1.82	0.6	0.08	21		
	1"	Passive Solar Extreme		WEA-N-301-00430-00001	0.30	0.33	0.40	42	Y	Y			1.70	0.6	0.08	22		
	1"	Passive Solar Extreme w/Argon		WEA-N-301-00438-00001	0.29	0.33	0.40	45	Y	Y			1.65	0.6	0.08	23		
	1"	Zo-e-shield 5		WEA-N-301-00425-00001	0.34	0.15	0.34	53					1.93	0.6	0.08	6		
	1"	Zo-e-shield 5 w/ Argon		WEA-N-301-00433-00001	0.31	0.15	0.34	56					1.76	0.6	0.08	10		
	1"	Zo-e-shield 5 Extreme		WEA-N-301-00429-00001	0.30	0.15	0.33	43	Y	Y	Y	Y	1.70	0.6	0.08	11		
	1"	Zo-e-shield 5 Extreme w/ Argon		WEA-N-301-00437-00001	0.28	0.15	0.33	46	Y	Y	Y	Y	1.59	0.6	0.08	14		
	1"	Zo-e-shield 6		WEA-N-301-00505-00001	0.33	0.15	0.33	52					1.87	0.6	0.08	8		
	1"	Zo-e-shield 6 w/ Argon		WEA-N-301-00512-00001	0.31	0.15	0.33	55					1.76	0.6	0.08	10		
	1"	Zo-e SafeGuard Certified		WEA-N-301-00508-00001	0.33	0.15	0.33	51					1.87	0.6	0.08	8		
	1"	Zo-e SafeGuard Certified w/ Argon		WEA-N-301-00515-00001	0.31	0.15	0.33	56					1.76	0.6	0.08	10		
	1"	Zo-e-shield 7		WEA-N-301-00487-00001	0.29	0.14	0.27	59	Y	Y	Y	Y	1.65	0.6	0.08	12		
	1"	Zo-e-shield 7 w/ Argon		WEA-N-301-00491-00001	0.26	0.14	0.27	62	Y	Y	Y	Y	1.48	0.6	0.08	16		
	1"	Insul Low-E 240		WEA-N-301-00427-00001	0.34	0.14	0.21	52					1.93	0.6	0.08	6		
	1"	Insul Low-E 240 w/Argon		WEA-N-301-00435-00001	0.32	0.14	0.21	55					1.82	0.6	0.08	8		
	1"	Insul Low-E 340		WEA-N-301-00428-00001	0.34	0.11	0.20	53					1.93	0.6	0.08	4		
	1"	Insul Low-E 340 w/Argon		WEA-N-301-00436-00001	0.31	0.10	0.20	56					1.76	0.6	0.08	7		
	1"	Bronze Low E		WEA-N-301-00424-00011	0.34	0.21	0.28	53					1.93	0.6	0.08	10		
	1"	Bronze Low E w/Argon		WEA-N-301-00432-00011	0.32	0.21	0.28	55					1.82	0.6	0.08	12		
Less Than 1" GIA or SDL	1"	Clear Insul		WEA-N-301-00423-00002	0.42	0.35	0.36	44					2.39	0.6	0.08	8		
	1"	Insul Low-E		WEA-N-301-00424-00002	0.34	0.20	0.32	53					1.93	0.6	0.08	9		
	1"	Insul Low E w/Argon		WEA-N-301-00432-00002	0.32	0.19	0.32	55					1.82	0.6	0.08	11		
	1"	Passive Solar		WEA-N-301-00426-00002	0.34	0.31	0.35	52					1.93	0.6	0.08	15		
	1"	Passive Solar w/Argon		WEA-N-301-00434-00002	0.32	0.31	0.35	55					1.82	0.6	0.08	18		
	1"	Passive Solar Extreme		WEA-N-301-00430-00002	0.30	0.29	0.34	42	Y	Y			1.70	0.6	0.08	19		
	1"	Passive Solar Extreme w/Argon		WEA-N-301-00438-00002	0.29	0.29	0.34	45	Y	Y			1.65	0.6	0.08	20		
	1"	Zo-e-shield 5		WEA-N-301-00425-00002	0.34	0.13	0.28	53					1.93	0.6	0.08	5		
	1"	Zo-e-shield 5 w/ Argon		WEA-N-301-00433-00002	0.31	0.13	0.28	56					1.76	0.6	0.08	9		
	1"	Zo-e-shield 5 Extreme		WEA-N-301-00429-00002	0.30	0.13	0.28	43	Y	Y	Y	Y	1.70	0.6	0.08	10		
	1"	Zo-e-shield 5 Extreme w/ Argon		WEA-N-301-00437-00002	0.28	0.13	0.28	46	Y	Y	Y	Y	1.59	0.6	0.08	13		
	1"	Zo-e-shield 6		WEA-N-301-00505-00002	0.33	0.13	0.28	52					1.87	0.6	0.08	6		
	1"	Zo-e-shield 6 w/ Argon		WEA-N-301-00512-00002	0.31	0.13	0.28	55					1.76	0.6	0.08	9		
	1"	Zo-e SafeGuard Certified		WEA-N-301-00508-00002	0.33	0.13	0.28	51					1.87	0.6	0.08	6		
	1"	Zo-e SafeGuard Certified w/ Argon		WEA-N-301-00515-00002	0.31	0.13	0.28	56					1.76	0.6	0.08	9		
	1"	Zo-e-shield 7		WEA-N-301-00488-00001	0.29	0.12	0.23	59	Y	Y	Y	Y	1.65	0.6	0.08	11		
	1"	Zo-e-shield 7 w/ Argon		WEA-N-301-00492-00001	0.27	0.12	0.23	62	Y	Y	Y	Y	1.53	0.6	0.08	13		
	1"	Insul Low-E 240		WEA-N-301-00427-00002	0.34	0.13	0.18	52					1.93	0.6	0.08	5		
	1"	Insul Low-E 240 w/Argon		WEA-N-301-00435-00002	0.32	0.12	0.18	55					1.82	0.6	0.08	7		
	1"	Insul Low-E 340		WEA-N-301-00428-00002	0.34	0.09	0.17	53					1.93	0.6	0.08	3		
	1"	Insul Low-E 340 w/Argon		WEA-N-301-00436-00002	0.31	0.09	0.17	56					1.76	0.6	0.08			

Thermal Performance Data

Premium Bi-fold Door (8622) - U-channel sill

WEATHER SHIELD.

WINDOWS & DOORS

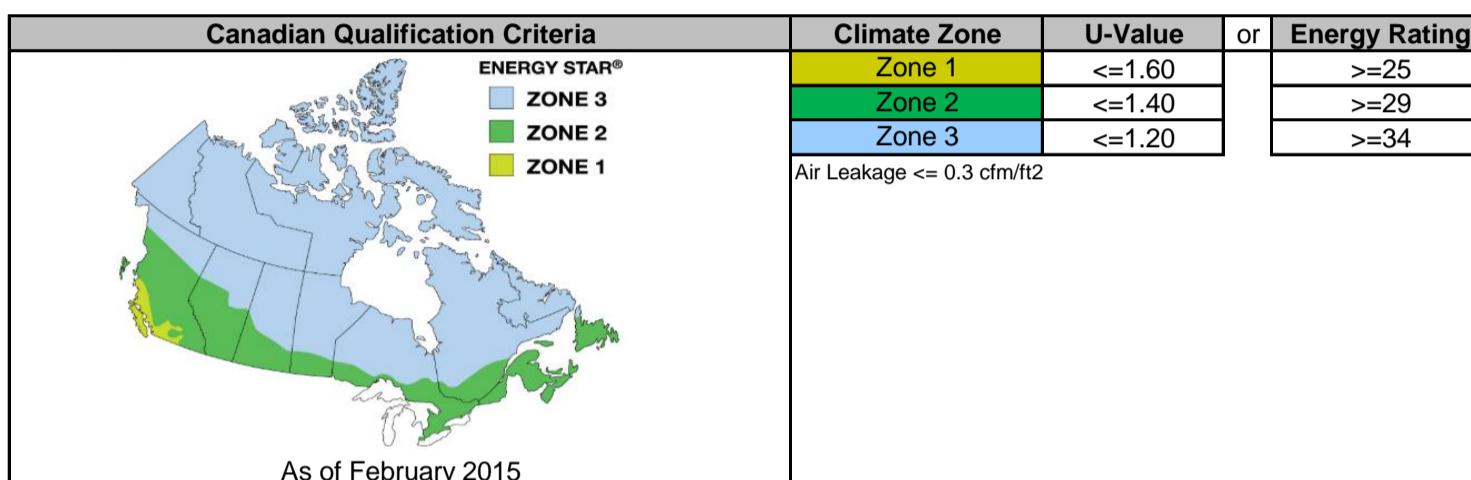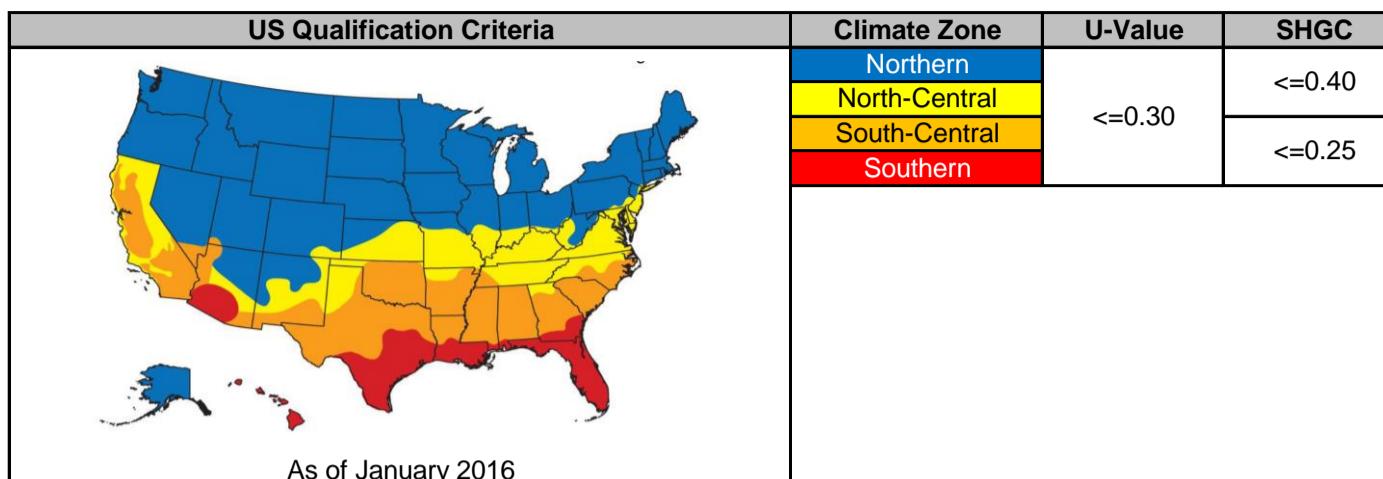

U-Value

A measurement of how much energy a material conducts. The lower the U-Value, the greater the insulating effect.

Solar Heat Gain Coefficient (SHGC)

Measures how well a window or door prevents heat from passing through it.

The lower a window or door's SHGC, the less heat it allows to pass through it.

Visible Light Transmittance

The amount of light in the visible portion of the spectrum that passes through a glazing material.

Condensation Resistance Rating

Measures how well a window resists the formation of condensation on the inside surface.

The higher the number the better resistance to condensation.

Energy Rating

A value demonstrating the balance between U-Value, SHGC and air leakage.

The higher the number, the more efficient the product.

R-Value

A measurement of how much a material resists heat transfer.

A higher R-Value means a greater insulating effect and a lower rate of heat flow out of the home.

While **R-value** measures resistance to heat transfer, **U-value** measures the rate of heat transfer.

In simple terms, **U-value** is the mathematical reciprocal of **R-value**; that is, **U = 1/R** and **R = 1/U**.

^a Total Unit calculations are derived from computer simulations that are then verified by 3rd party testing in accordance with NFRC 100, NFRC 200, and NFRC 500.

^b Published values reflect 3mm/3mm glass lite thicknesses.

ENERGY PERFORMANCE DATA											CANADIAN ENERGY PEFORMANCE DATA				CANADA ENERGY STAR v 4.1			
Grille Option	Glazing thickness	^a NFRC Total Unit Calculations ^b Glazing Option		CPD #	U-Value	Solar Heat Gain Coefficient	Visible Light Transmittance	Condensation Resistance Rating	US ENERGY STAR V 6.0				U-Value (metric)	Maximum Air Leakage Ls/m ²	Air Infiltration/Exfiltration Average	Energy Rating		
									N	NC	SC	S						
No GIA or SDL	1"	Clear Insul		WEA-N-301-00603-00001	0.42	0.41	0.43	46					2.39	0.6	0.08	11		
	1"	Insul Low-E		WEA-N-301-00604-00001	0.34	0.23	0.37	53					1.93	0.6	0.08	11		
	1"	Insul Low E w/Argon		WEA-N-301-00612-00001	0.32	0.22	0.37	55					1.82	0.6	0.08	13		
	1"	Passive Solar		WEA-N-301-00606-00001	0.34	0.37	0.41	52					1.93	0.6	0.08	19		
	1"	Passive Solar w/Argon		WEA-N-301-00614-00001	0.32	0.37	0.41	55					1.82	0.6	0.08	21		
	1"	Passive Solar Extreme		WEA-N-301-00610-00001	0.30	0.33	0.40	42	Y	Y			1.70	0.6	0.08	22		
	1"	Passive Solar Extreme w/Argon		WEA-N-301-00618-00001	0.29	0.33	0.40	45	Y	Y			1.65	0.6	0.08	23		
	1"	Zo-e-shield 5		WEA-N-301-00605-00001	0.33	0.15	0.34	53					1.87	0.6	0.08	8		
	1"	Zo-e-shield 5 w/ Argon		WEA-N-301-00613-00001	0.31	0.15	0.34	56					1.76	0.6	0.08	10		
	1"	Zo-e-shield 5 Extreme		WEA-N-301-00609-00001	0.30	0.15	0.33	43	Y	Y	Y	Y	1.70	0.6	0.08	11		
	1"	Zo-e-shield 5 Extreme w/ Argon		WEA-N-301-00617-00001	0.28	0.15	0.33	46	Y	Y	Y	Y	1.59	0.6	0.08	14		
	1"	Zo-e-shield 6		WEA-N-301-00685-00001	0.33	0.15	0.33	52					1.87	0.6	0.08	8		
	1"	Zo-e-shield 6 w/ Argon		WEA-N-301-00692-00001	0.31	0.15	0.33	55					1.76	0.6	0.08	10		
	1"	Zo-e SafeGuard Certified		WEA-N-301-00688-00001	0.33	0.15	0.33	51					1.87	0.6	0.08	8		
	1"	Zo-e SafeGuard Certified w/ Argon		WEA-N-301-00695-00001	0.31	0.15	0.33	56					1.76	0.6	0.08	10		
	1"	Zo-e-shield 7		WEA-N-301-00667-00001	0.29	0.14	0.27	59	Y	Y	Y	Y	1.65	0.6	0.08	12		
	1"	Zo-e-shield 7 w/ Argon		WEA-N-301-00671-00001	0.26	0.14	0.27	62	Y	Y	Y	Y	1.48	0.6	0.08	16		
	1"	Insul Low-E 240		WEA-N-301-00607-00001	0.34	0.14	0.21	52					1.93	0.6	0.08	6		
	1"	Insul Low-E 240 w/Argon		WEA-N-301-00615-00001	0.32	0.14	0.21	55					1.82	0.6	0.08	8		
	1"	Insul Low-E 340		WEA-N-301-00608-00001	0.34	0.11	0.20	53					1.93	0.6	0.08	4		
	1"	Insul Low-E 340 w/Argon		WEA-N-301-00616-00001	0.31	0.10	0.20	56					1.76	0.6	0.08	7		
	1"	Bronze Low E		WEA-N-301-00604-00011	0.34	0.21	0.28	53					1.93	0.6	0.08	10		
	1"	Bronze Low E w/Argon		WEA-N-301-00612-00011	0.32	0.21	0.28	55					1.82	0.6	0.08	12		
Less Than 1" GIA or SDL	1"	Clear Insul		WEA-N-301-00603-00002	0.42	0.35	0.36	46					2.39	0.6	0.08	8		
	1"	Insul Low-E		WEA-N-301-00604-00002	0.34	0.20	0.32	53					1.93	0.6	0.08	9		
	1"	Insul Low E w/Argon		WEA-N-301-00612-00002	0.32	0.19	0.32	55					1.82	0.6	0.08	11		
	1"	Passive Solar		WEA-N-301-00606-00002	0.34	0.31	0.35	52					1.93	0.6	0.08	15		
	1"	Passive Solar w/Argon		WEA-N-301-00614-00002	0.32	0.31	0.35	55					1.82	0.6	0.08	18		
	1"	Passive Solar Extreme		WEA-N-301-00610-00002	0.30	0.29	0.34	42	Y	Y			1.70	0.6	0.08	19		
	1"	Passive Solar Extreme w/Argon		WEA-N-301-00618-00002	0.29	0.29	0.34	45	Y	Y			1.65	0.6	0.08	20		
	1"	Zo-e-shield 5		WEA-N-301-00605-00002	0.33	0.13	0.28	53					1.87	0.6	0.08	6		
	1"	Zo-e-shield 5 w/ Argon		WEA-N-301-00613-00002	0.31	0.13	0.28	56					1.76	0.6	0.08	9		
	1"	Zo-e-shield 5 Extreme		WEA-N-301-00609-00002	0.30	0.13	0.28	43	Y	Y	Y	Y	1.70	0.6	0.08	10		
	1"	Zo-e-shield 5 Extreme w/ Argon		WEA-N-301-00617-00002	0.28	0.13	0.28	46	Y	Y	Y	Y	1.59	0.6	0.08	13		
	1"	Zo-e-shield 6		WEA-N-301-00685-00002	0.33	0.13	0.28	52					1.87	0.6	0.08	6		
	1"	Zo-e-shield 6 w/ Argon		WEA-N-301-00692-00002	0.31	0.13	0.28	55					1.76	0.6	0.08	9		
	1"	Zo-e SafeGuard Certified		WEA-N-301-00688-00002	0.33	0.13	0.28	51					1.87	0.6	0.08	6		
	1"	Zo-e SafeGuard Certified w/ Argon		WEA-N-301-00695-00002	0.31	0.13	0.28	56					1.76	0.6	0.08	9		
	1"	Zo-e-shield 7		WEA-N-301-00668-00001	0.29	0.12	0.23	59	Y	Y	Y	Y	1.65	0.6	0.08	11		
	1"	Zo-e-shield 7 w/ Argon		WEA-N-301-00672-00001	0.27	0.12	0.23	62	Y	Y	Y	Y	1.53	0.6	0.08	13		
	1"	Insul Low-E 240		WEA-N-301-00607-00002	0.34	0.13	0.18	52					1.93	0.6	0.08	5		
	1"	Insul Low-E 240 w/Argon		WEA-N-301-00615-00002	0.32	0.12	0.18	55					1.82	0.6	0.08	7		
	1"	Insul Low-E 340		WEA-N-301-00608-00002	0.34	0.09	0.17	53					1.93	0.6	0.08	3		
	1"	Insul Low-E 340 w/Argon		WEA-N-301-00616-00002	0.31	0.09	0.17	56					1.76	0.6	0.08			